

NIGHTLOCK LOCKDOWN 2

Designed for Outward Swing Doors with Hollow Metal Door Frames.




With the
NIGHTLOCK LOCKDOWN 2
your doors can be secured in
seconds, from inside the classroom.
Included with each device is a stor-
age Wall Box, where you can keep
the locking handle ready to use.

A release tool is available for staff
and first responders for disengaging
the devise from the outside
of the room.

Nightlock Lockdown 2 is available in
various lengths to accommodate almost
any commercial hollow metal door
frame.

Our Door Frame Gage makes it easy to
order the right size for your needs.

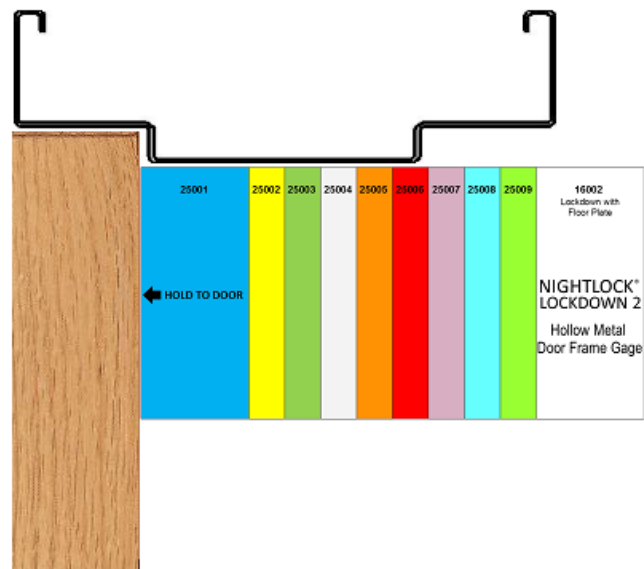

NIGHTLOCK® LOCKDOWN
By Taylor Brothers Door Lock LLC

Nightlock Lockdown 2 - Installation Instructions

Patent #8,894,110

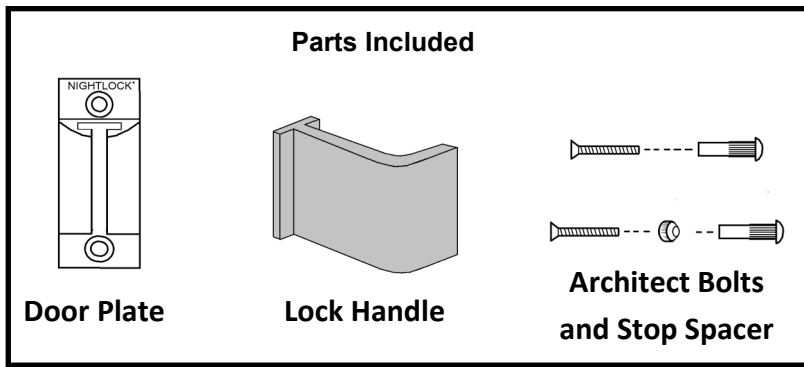


FIG. 1

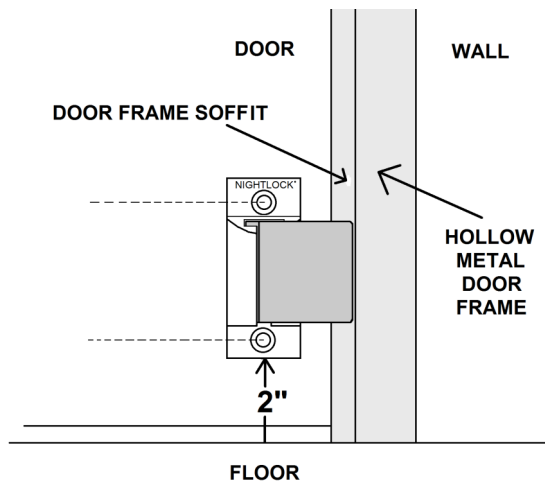


FIG. 2

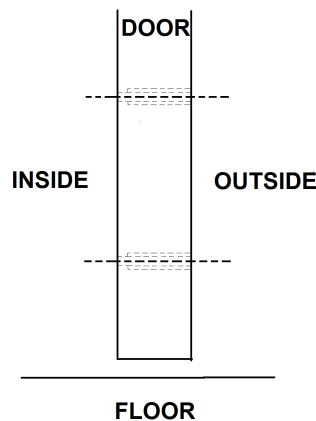


FIG. 3



FOR USE ON OUTWARD SWING DOORS

Step 1. To locate mounting holes, position Door Plate and Lock Handle (engaged), at inside bottom of closed door, with Lock Handle overlapping door frame soffit, at opening side of door, (FIG 1) at recommended height of 2" above floor. Mark hole locations.

Note: Lock Handle should overlap door frame soffit completely, yet still slide up and down easily.

Step 2. Drill 1/4" Dia. holes completely through door, from the inside, then from the outside, drill with a 3/8" Dia. drill bit, almost all the way back through, deep enough to accept female portion of architect bolt. (FIG. 2)

Step 3. Attach Door Plate as shown, (FIG. 3) with included hardware.

Note: Stop Spacer is attached on lower bolt only.

Patent #8,894,110

TOOLS NEEDED:

POWER DRILL / SCREW DRIVER
 3/8" DIA. DRILL BIT (for wood or metal door).
 1/4" DIA. DRILL BIT (for wood or metal door).

INSTALLATION TUTORIAL VIDEOS:

Available Online At: www.nightlock.com
 See Other Nightlock Products At: www.nightlock.com
 For Ordering and Customer Service Call 855-644-4856

IMPORTANT:


Practice Drills - Schedule regular practice drills. Teachers should be skilled and ready to react during an emergency.
Lock Handle Location - Teachers should check daily to ensure lock handle is available and ready for use, in it's proper secure location.
Janitorial / Maintenance - Check bolts and screws periodically to ensure they are tight and secure.
Extra Lock Handles and Emergency Release Tool - Make regular checks to ensure extra lock handles and emergency release tools are available if needed, and kept at a secure location such as an administrators office.



Taylor Brothers Door Lock
 Flint, Michigan 48505 USA

Patent #8,894,110

Copyright 2016 Taylor Brothers Door Lock, LLC.

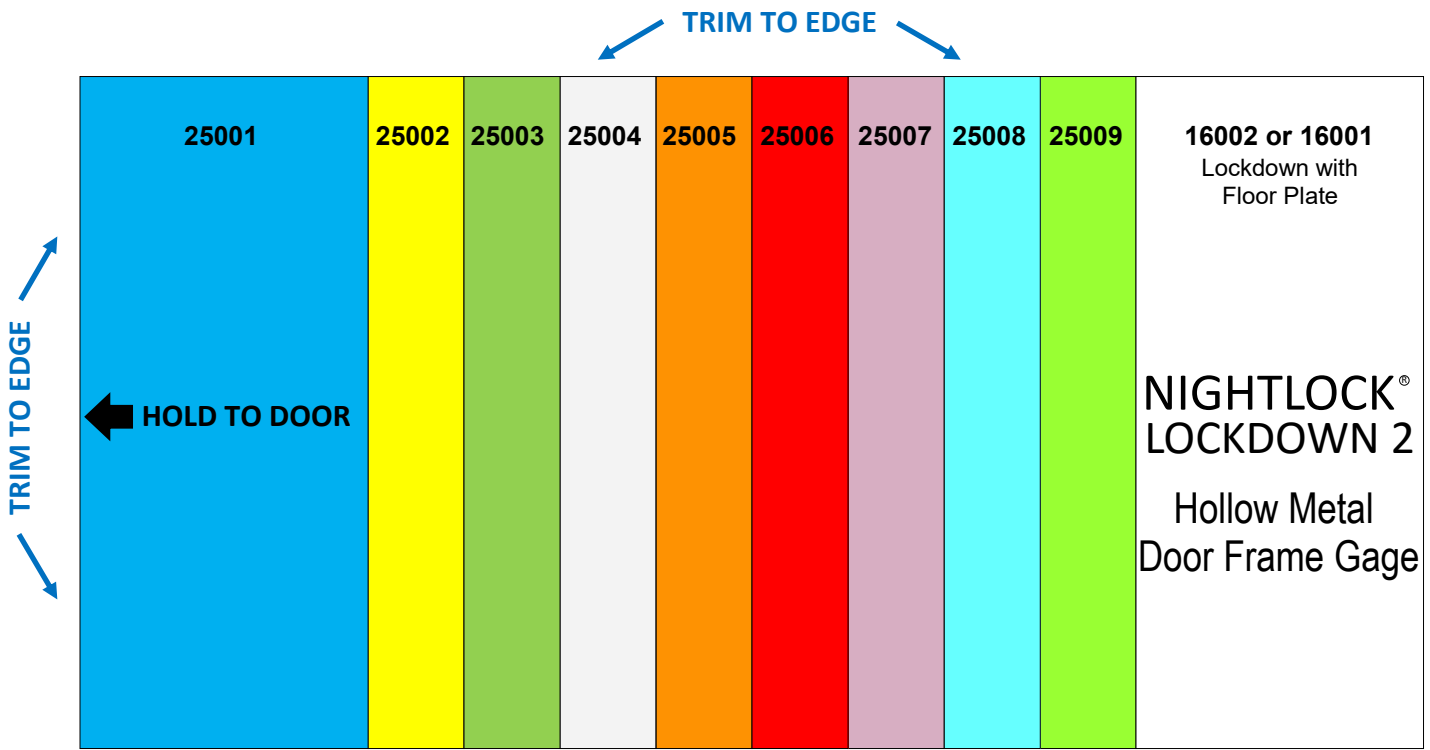

USE THE SIZE CARD

TO DETERMINE WHICH NIGHTLOCK 2 LOCKING HANDLE WILL FIT YOUR HOLLOW METAL DOOR FRAMES.


EACH DOOR MAY BE DIFFERENT. DOORS MAY BE BOWED OR WARPED .

HOLD THE BLUE END OF THE SIZE CARD AGAINST THE BOTTOM OF THE DOOR, NOTE NUMBER AT SOFFET EDGE.

IF SOFFET EDGE IS ON A LINE BETWEEN COLORS, CHOOSE THE NEXT NUMBER.

EXAMPLE:

IF THE SOFFET EDGE IS WITH-IN THE YELLOW ZONE YOU NEED LOCKING HANDLE # 25002

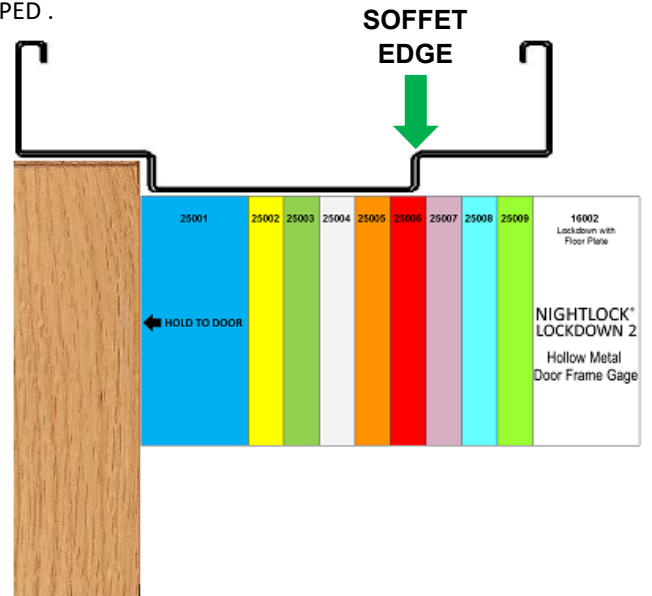

PRINTING THIS PAGE:

When printed, this page **MUST** print to exact size.

The Gage measures 7" from end to end.

The Colored sections are in exactly 1/2" increments.

TRIM: TOP and LEFT Margins to edge of Gage.



CONTACT or QUESTIONS? Please Call: 855-644-4856